


TECHNICAL DETAILS

Product No.	FSSG. 1019. XX65. 1224
Power	19.2 W/M
Voltage	24V
CRI	80
Led Qty	120LEDs/M
Length/Reel	5M
Working Temperature	-20~50°C
Storage Temperature	-30~80°C


LIGHT DISTRIBUTION

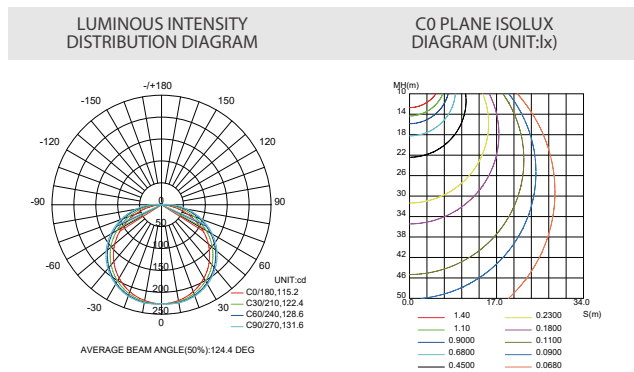

LUMENS PER METER


Color Temperature	
3000-3500K	2150lm
4000-4500K	2270lm
6500-7000K	2250lm

DIMENSION

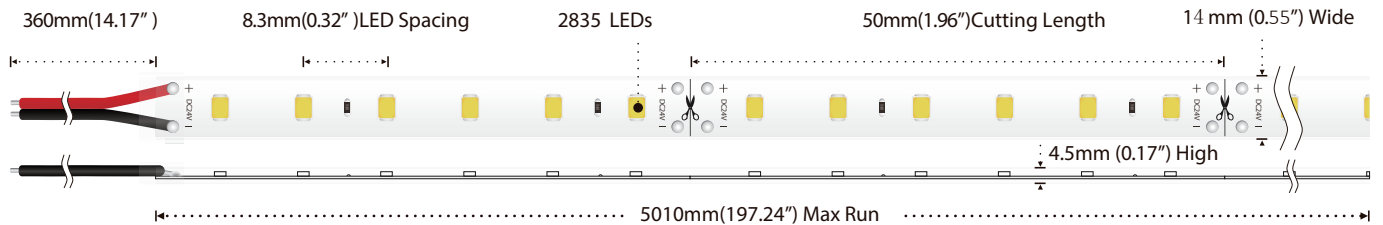


ACCESSORIES SPECIFICATION

Name	Quantity
① Cap	5pc
② Clips	10pc
③ Screw	10pc
④ Glue	1pc
● Glue nozzle	1pc

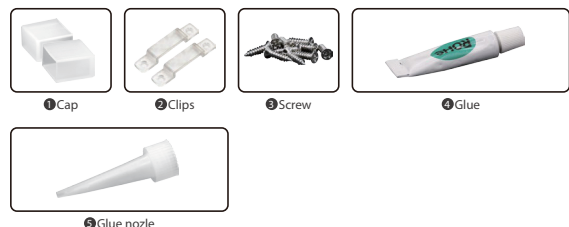




POWER CONNECTION DIAGRAM

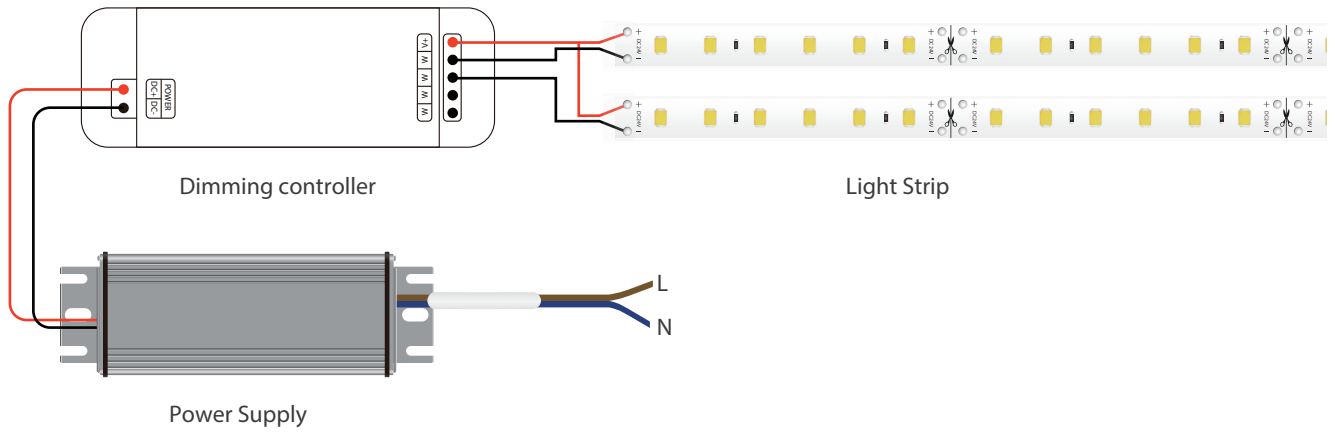

INSTALL

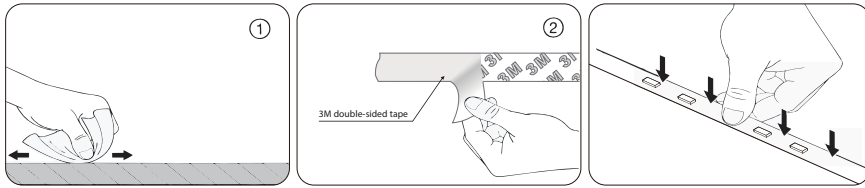

Clean the environment part to be attached with a cloth, as shown in Figure 1, and then tear off the 3M tape on the back of the light belt, and finally stick the light belt on the clean place.

*Please refer to the installation manual for details

PACKING

Box dimension(mm)	Carton dimension(mm)	Electrostatic size(mm)	Reel size(mm)	outer box(bags/carton)
500×260×380	360×240×240	240×240	7×12	40
Net weight (kg)	Each box net(kg)	Gross weight of each box(kg)	Bag quantity(bags/carton)	
0.24	9.6	10.9	20	

